

Company name	WOSPerformance
Reference number	
Part	LMA308
Manufacturer	WOSP
Nominal current [A]	175A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	94 A	
Maximum output power	2214 W	
Max output current	173 A	
Ripple	6 A	
Leakage	<5mA	
Maximum efficiency	46 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1140 rpm	
Motor power	4.8 kW	
Torque	12.3 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	289 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.5 V	
VSP @6,000	14.6 V	
Duration of the procedure	42.9 s	
Three-phase voltage	410.6 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	

**Activity chart**

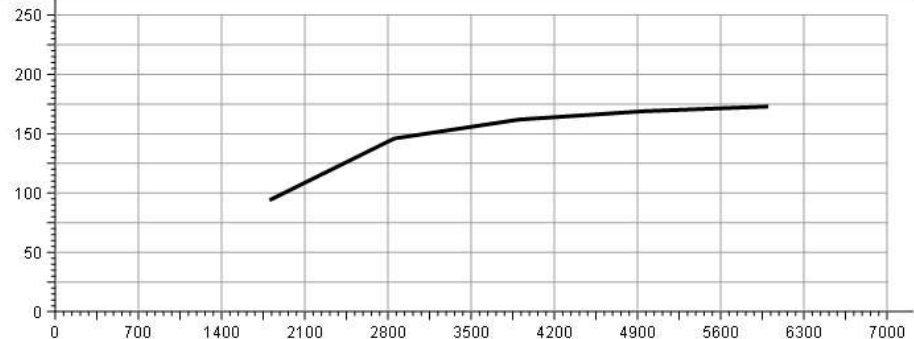

**Data**

[RPM]	Current [A]	Reference [A]
6000	173	
4952	169	
3902	162	
2851	146	
1803	94	